


- Ethernet based LAN, WAN and other networking applications
- PoE 350mA Current Capability
- Meets IEEE 802.3af & ANSI X 3.263 Standards
- LL: 0.5μH Max @ 100KHz, 200mV
- Cw/w: 25PF TYP @ 100KHz, 200mV
- Operating Temp: 0°C to +70°C
- Storage Temp: -25°C to +125°C



Electrical Specifications @ 25°C

Part Number	OCL(μH Min) @ 100kHz, 200mV	Turns Ratio chip: cable (±5%)	Insertion Loss (dB Max)					Return Loss (dB Min)	
	With 8mA DC Bias		1-100MHz	1-30MHz	40MHz	50MHz	60-80MHz	100MHz	
AGSC-2401PS	350	1CT:1CT(TX)/1CT:1CT(RX)	-1.0 Max	-18	-14.4	-13.1	-12	-10	


Electrical Specifications @ 25°C

Part Number	Common Mode Rejection (dB Min)			Cross Talk (dB Min)			Isolation HI-POT (Vrms)
	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	
AGSC-2401PS	-40	-35	-30	-45	-40	-35	1500

All specifications subject to change without notice.

MECHANICAL

Dimensions: $\frac{\text{inch}}{\text{mm}}$

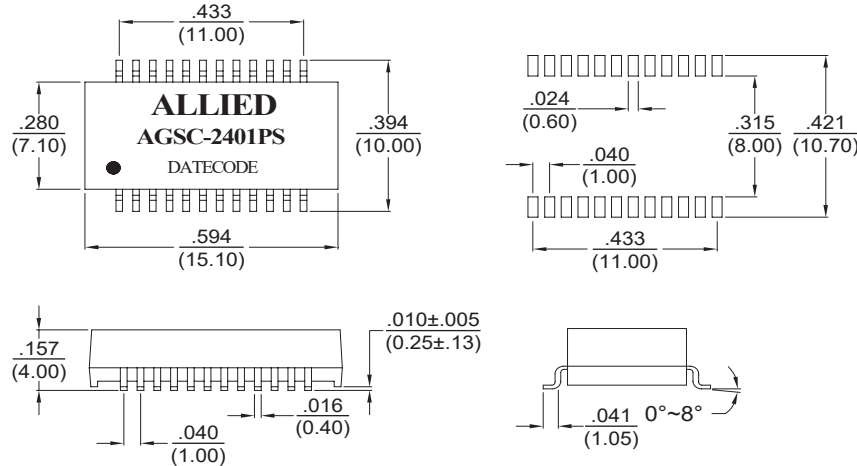

Unless otherwise specified, all tolerances are ±0.010(0.25)

SCHEMATICS

