

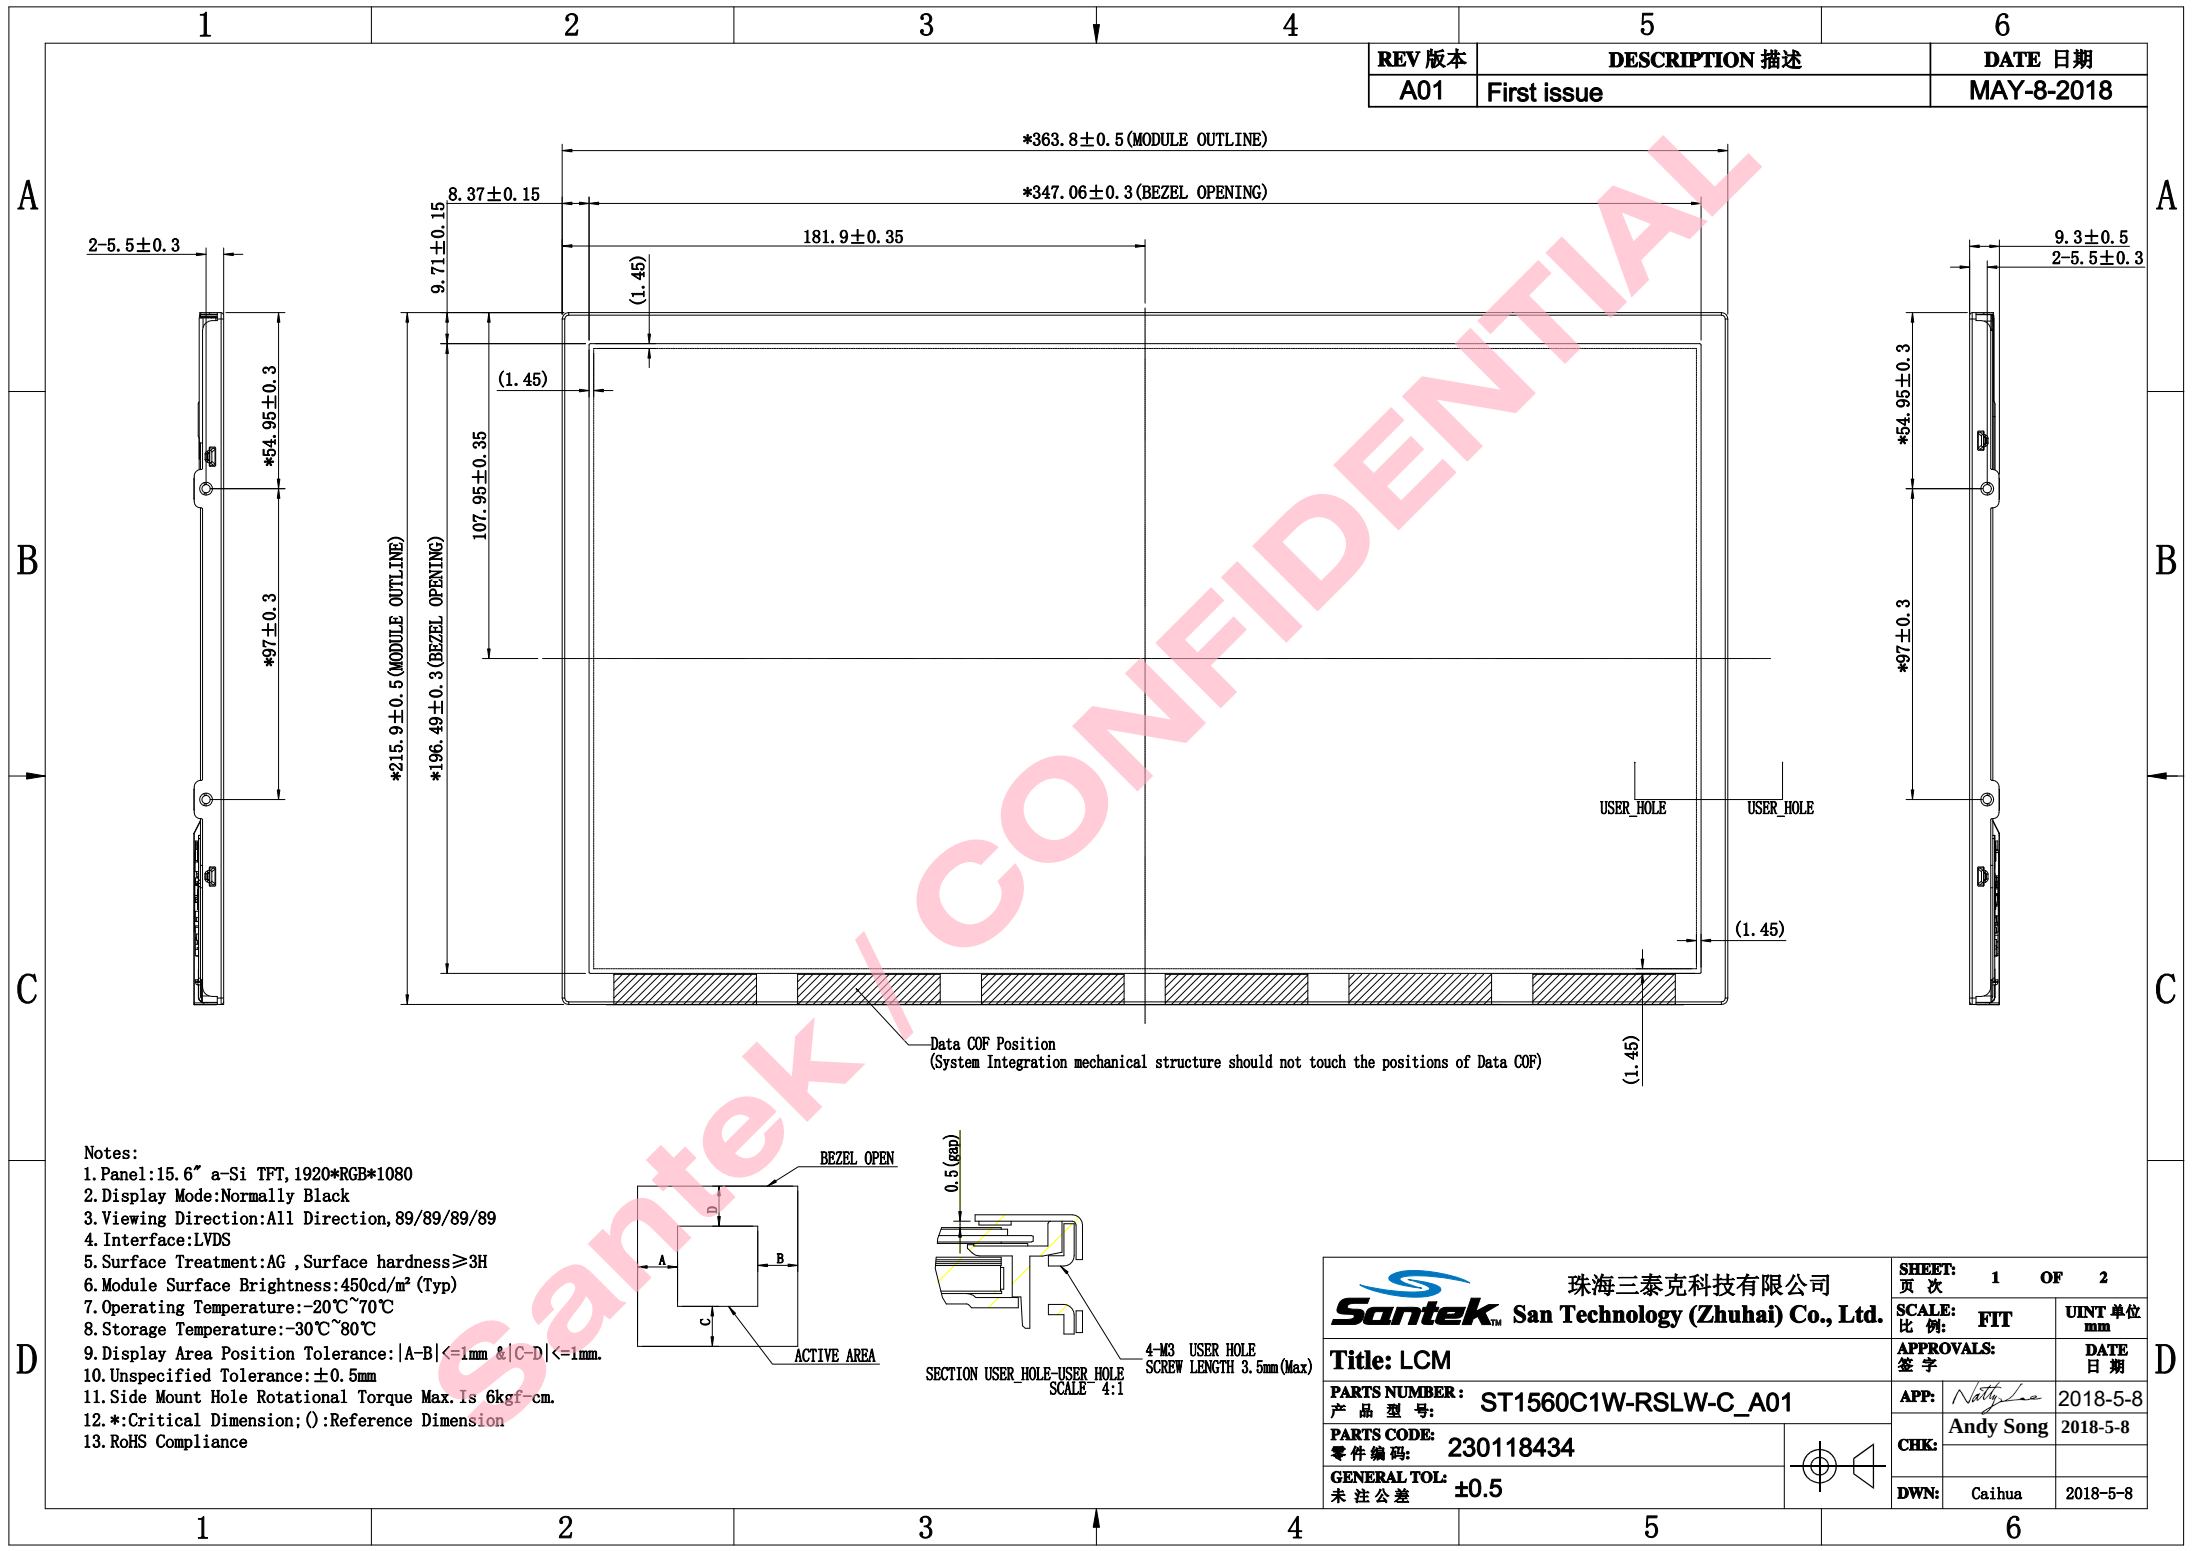


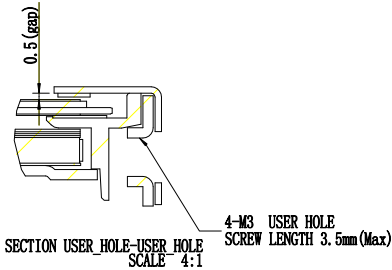


Notes:

- Panel: 15.6" a-Si TFT, 1920*RGB*1080
- Display Mode: Normally Black
- Viewing Direction: All Direction, 89/89/89/89
- Interface: LVDS
- Surface Treatment: AG, Surface hardness ≥ 3H
- Module Surface Brightness: 450cd/m² (Typ)
- Operating Temperature: -20°C ~ 70°C
- Storage Temperature: -30°C ~ 80°C
- Display Area Position Tolerance: |A-B| ≤ 1mm & |C-D| ≤ 1mm
- Unspecified Tolerance: ±0.5mm
- Side Mount Hole Rotational Torque Max. Is 6kgf-cm.
- *: Critical Dimension; (): Reference Dimension
- RoHS Compliance



Santek 珠海三泰克科技有限公司 San Technology (Zhuhai) Co., Ltd.		SHEET: 1 OF 2 页次	
Title: LCM		SCALE: 比例: FIT	UNIT 单位: mm
PARTS NUMBER: 产品型号: ST1560C1W-RSLW-C_A01		APPROVALS: 签字	DATE 日期
PARTS CODE: 零件编码: 230118434		APP: Andy Song	2018-5-8
GENERAL TOL: 未注公差 ±0.5		CHK:	2018-5-8
		DWN: Caihua	2018-5-8

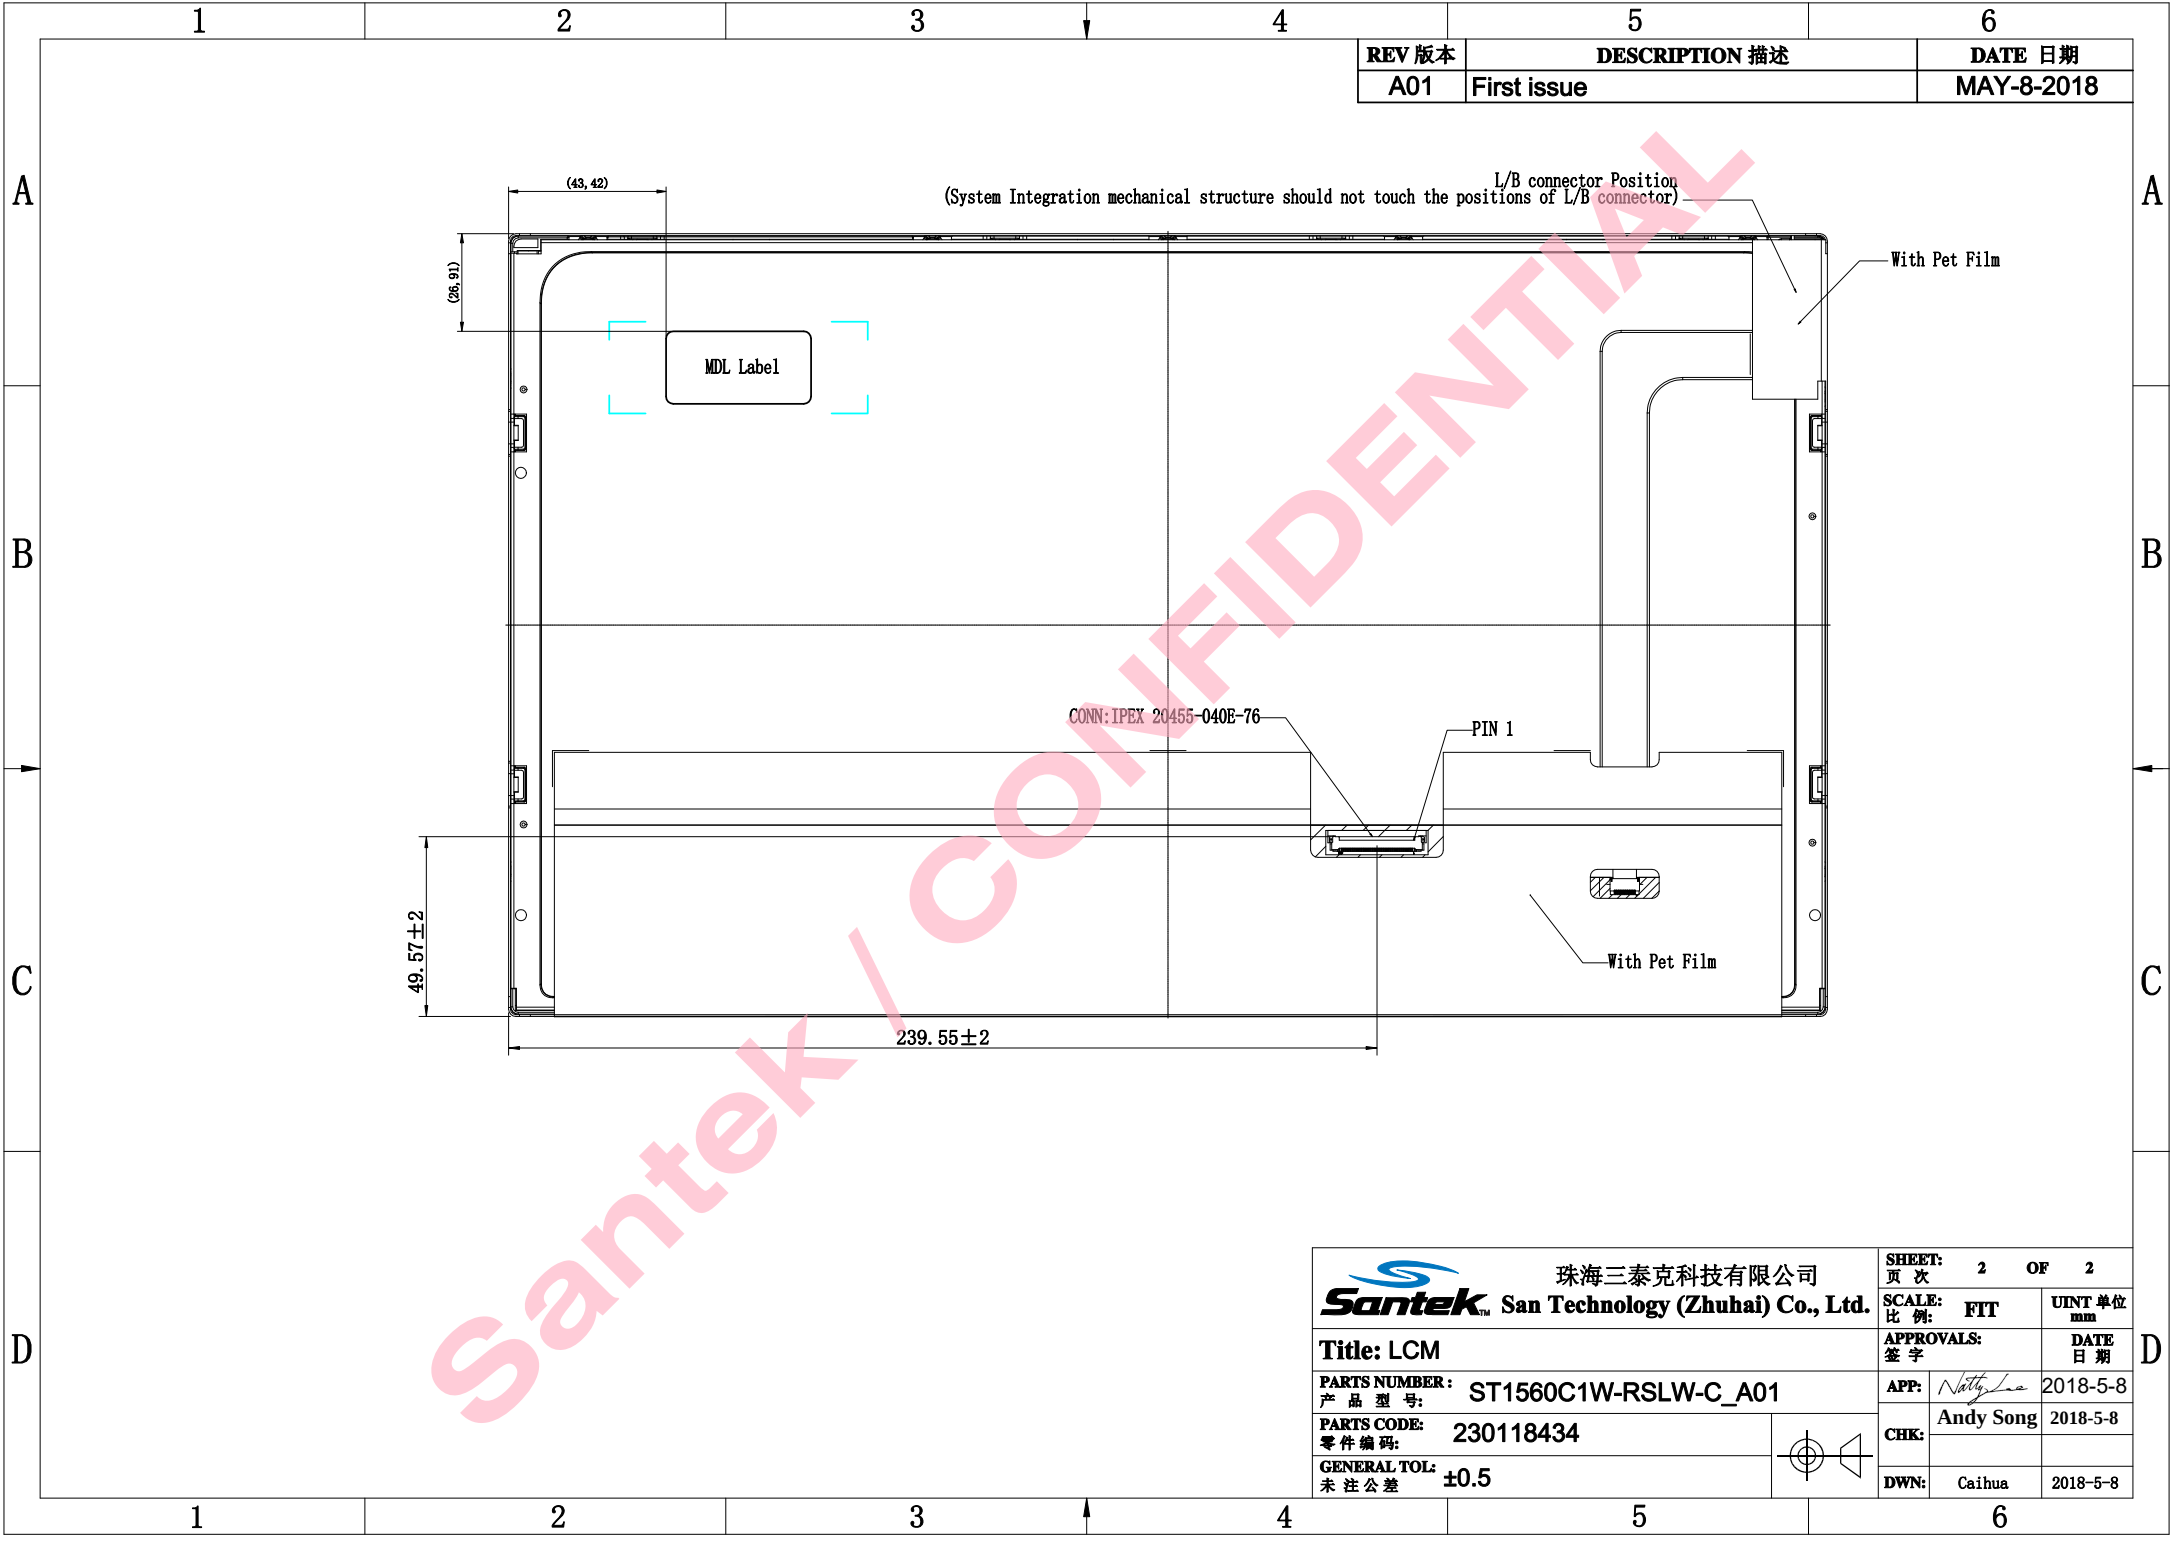

REV 版本	DESCRIPTION 描述	DATE 日期
A01	First issue	MAY-8-2018

Santek 珠海三泰克科技有限公司 San Technology (Zhuhai) Co., Ltd.		SHEET: 2 OF 2
Title: LCM		SCALE: FIT UNIT 单位 mm
PARTS NUMBER: ST1560C1W-RSLW-C_A01		APPROVALS: 签字 DATE 日期
PARTS CODE: 230118434		APP: Natty Lee 2018-5-8
GENERAL TOL: 未注公差 ±0.5		CHK: Andy Song 2018-5-8
		DWN: Caihua 2018-5-8