
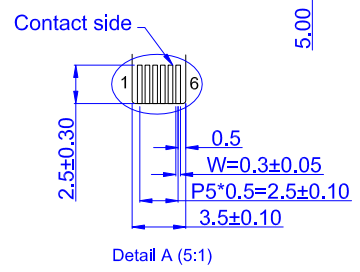
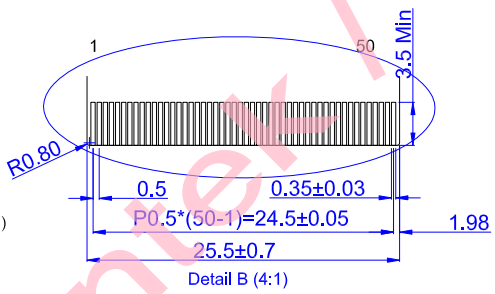
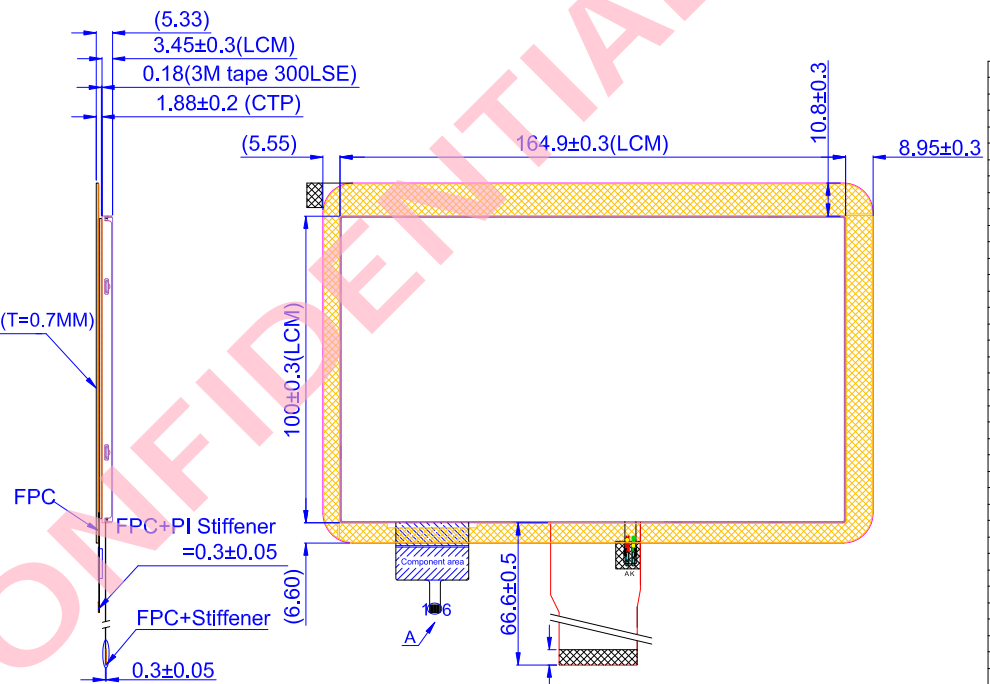



REV 版本	DESCRIPTION 描述	DATE 日期
A01	First issue	APR-01-2020

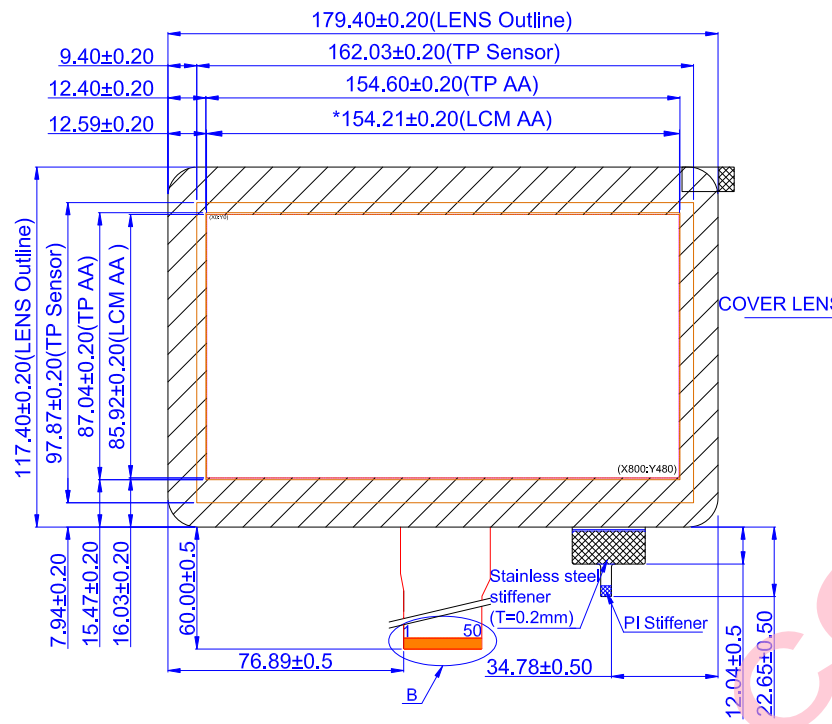

PIN	PIN B
1	LED A
2	LED A
3	LED K
4	LED K
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VSD
11	HSD
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	SHLR
40	UPDN
41	VDDG
42	VEEG
43	AVDD
44	RSTB
45	NC
46	VCOM
47	DITH
48	GND
49	NC
50	NC

PIN	PIN A
1	VDD2.8V
2	RST
3	INT
4	SDA
5	SCL
6	GND

- Note:
- View direction: 85/85/85/85
 - Center brightness: 500cd/m² (min)/600 cd/m² (TYP)
 - Uniformity: >75%; Backlight: 9.6V, 200mA
 - CTP Main Parameters:
 - Structure Type :G+G
 - IC: FT5616; Interface: I²C
 - Operating Voltage: DC 2.8~3.6V
 - Surface Hardness: >6H
 - Operating temp: -20°C~70°C
 - Storage temp: -30°C~80°C
 - ROHS Compliance



San Technology, Inc.		SCALE: 比例	1:1
Title: LCM		SHEET: 页次	1 OF 1
PARTS NUMBER: ST0700J3WCY-RSMLW-F_A01		GENERAL TOL: 未注公差	±0.2 UNIT 单位 mm
PARTS CODE: 200000794		APPROVALS 签字	DATE 日期
DRAWING NO: 图号:		APP: <i>Nathy Lee</i>	2020.Apr.9
		CHK: Andy Song	2020-4-8
		DWN: Jack Lee	2020-4-1