


D62-040-30

Industrial L2 PRO 4-Port Gigabit PoE+ Switch with 12V/24VDC Output, Digital Input/Output, 90W bt PoE Input

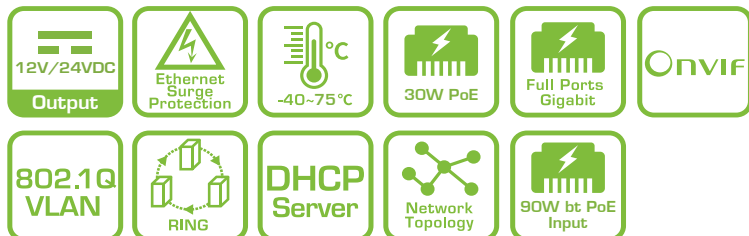

The D62-040-30 are industrial-grade L2 PRO PoE switches with 6KV Ethernet port surge protection, making them highly resilient in harsh weather conditions ranging from -40°C to 75°C. These switches offer robust outdoor connectivity, allowing seamless power and data supply to PoE PDs, such as outdoor IP cameras, wireless APs, and various other outdoor industrial applications.


The D62-040-30 currently power source equipment (PSE) that provides up to 30W PoE budget per port. With 4-ports Gigabit PoE (10M/100M/1G) capability, the D62 can efficiently transmit data and power to PoE PDs over a single network cable.

In addition to the standard features of an L2+ switch, including QoS, security, spanning tree, cable length measurement, and SNMP v1/v2c/v3 support, this switch offers an exclusive web-based graphic user interface for IP video surveillance, making it easy for users to configure and manage their video systems. The GUI automatically generates a device list, network topology maps, cable diagnostics, and PoE management, further enhancing the efficiency and convenience of network operations.

Features


- Layer 2 Switch
 - 802.1d (STP), 802.1w (RSTP), 802.1s (MSTP)
 - Loop protection
 - SNMP v1/v2c/v3
 - QoS
 - VLAN
 - Ethernet cable length measurement
 - DHCP Server
- Network Topology System
 - Automatic discovery for ONVIF camera
 - Generates camera topology map automatically
 - Cable diagnostic & reboot camera remotely
 - PoE management
 - Topology view / Floor view / Google map
 - Monitor / Configure / Manage ONVIF camera thru web
- Operating temperature between -40°C and 75°C
- Compliant IEEE802.3at 30W per port
- Supports 10/100/1000Mbps data rates
- 6KV PoE surge protection
- IEEE 802.3az Energy Efficient Ethernet standard for green power
- 90W bt PoE input

Dimensions

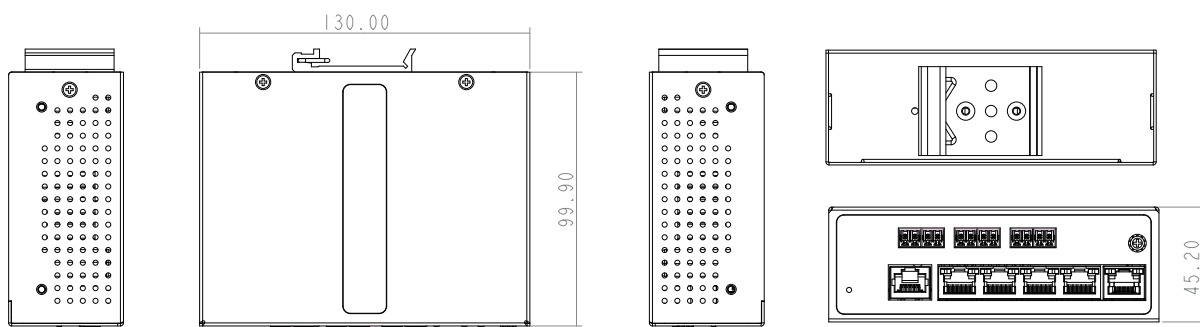

Unit: mm

Applications

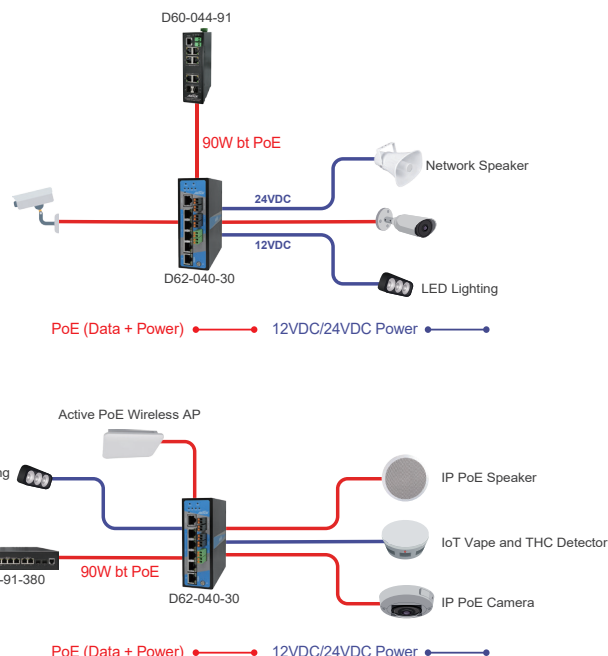

Device List

Show 10 entries

Status	Device Type	Model Name	Device Name	MAC	IP Address
Online	PoESW	H60-084-30-250	H60-8p @ 203 name	68:8D:B6:00:CB:00	192.168.10.203
Online	PoESW	H60-084-30-250	H60-8p @ 209 name	68:8D:B6:00:D1:00	192.168.10.209
Online	IPMX	M6000-AIW	M6000-AIW	68:8D:B6:01:E1:B1	192.168.10.165
Online	IP Camera	SNC-VB635	Sony	D8:D4:3C:DD:F5:C7	192.168.10.122
Online	IP Camera	WV-S1131	Panasonic_WV-S1131	BC:C3:42:71:79:D0	192.168.10.104
Online	IPSG	SD-504	SD-504	68:8D:B6:00:00:01	192.168.10.108
Online	PC	General Computer	FC2564	00:50:56:2D:FA:AC	192.168.10.201
Online	Others	Unknown model	Unknown name	04:D4:C4:2C:B5:EC	192.168.10.1
Online	Others	Unknown model	Unknown name	94:C6:91:5F:9E:EA	192.168.10.180
Online	PC	General Computer	MIS-TEMP-NB4	A0:A8:CD:26:FE:FD	192.168.10.192

Showing 1 to 10 of 29 entries

Previous


1

2

3

Next

Edit

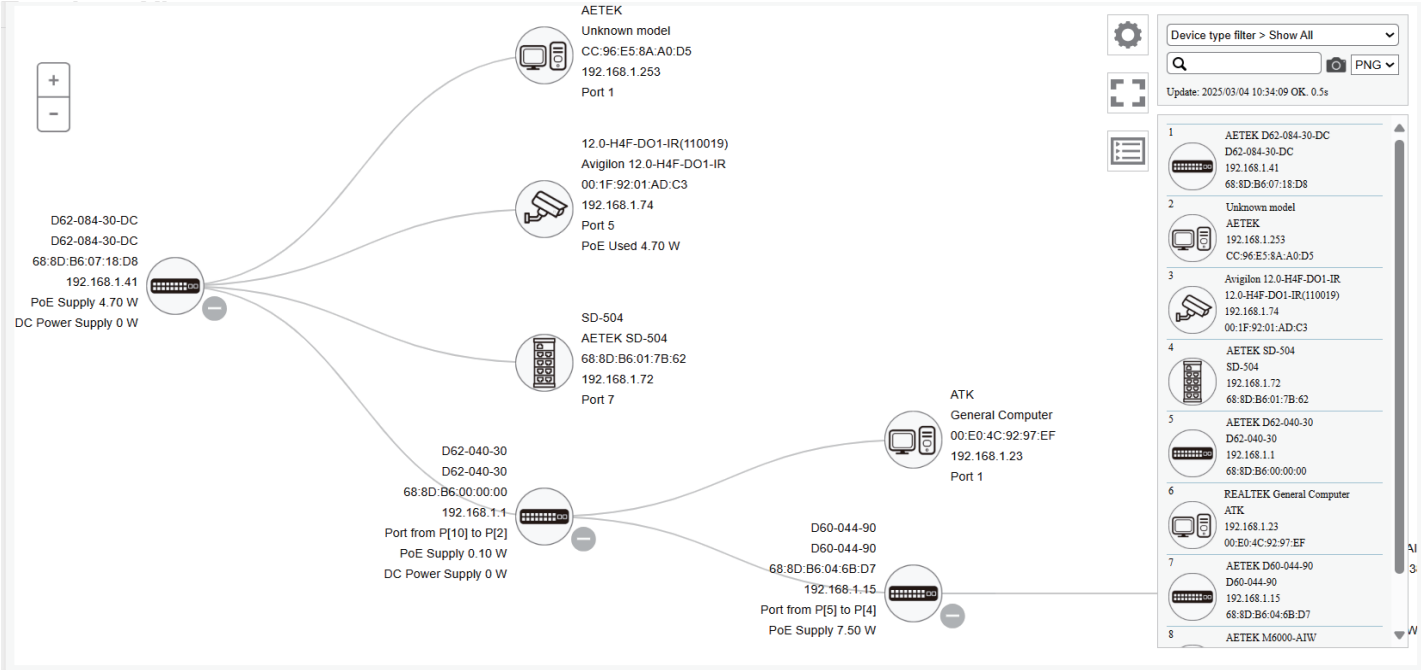

Google Map View

Search Box

Map

Device Dashboard

Device Type

Device Name

Model Name

MAC Address

IP Address

Http Port

PoE Supply

DC Power Supply

API Account

API Password

WAN Address

WAN Port

Close

Apply

Upgrade

PoE Config

DC Config

Dashboard

Notification

Device type filter > Show All

Floor-Plan(192.168.1.1)

Update: 2025/03/04 10:45:14 OK. 0.5s

1

2

3

4

5

6

7

Floor View

Device Dashboard

Device Type: PoE Switches

Device Name: D62-040-30

Model Name: D62-040-30

MAC Address: 68:8D:B6:00:00:00

IP Address: 192.168.1.1

Http Port: 80

PoE Supply: 0 W

DC Power Supply: 0 W, 0 A

API Account: admin

API Password: *****

WAN Address:

WAN Port:

Device type filter > Show All

Floor-Plan(192.168.1.1)

Update: 2025/03/04 10:45:14 OK. 0.5s

- AETEK D62-084-30-DC
D62-084-30-DC
192.168.1.41
68:8D:B6:07:1D:88
- General Computer
AETEK
192.168.1.253
CC:96:E3:8A:A0:D5
- AETEK SD-504
SD-504
192.168.1.72
68:8D:B6:01:7B:62
- AETEK D62-040-30
D62-040-30
192.168.1.1
68:8D:B6:00:00:00
- Avigilon 12.0-H4F-DO1-IR
12.0-H4F-DO1-IR(110019)
192.168.1.74
00:1F:92:01:AD:C3
- AETEK D60-044-90
D60-044-90
192.168.1.15
68:8D:B6:04:6B:D7
- AETEK M6000-A1V

ATK General

00:E0:192:1F:92:01

Port 1

Device Type
IP Cameras
✕

Device Name

Model Name

MAC Address

IP Address

Http Port

PoE Used

WAN Address

WAN Port

12.0-H4F-DO1-IR(110019)

12.0-H4F-DO1-IR

00:1F:92:01:AD:C3

192.168.1.74

80

5.5 W

✕ Close
✓ Apply

Login
 Diagnostics
 PoE Reboot

Dashboard
 Notification
 Monitor

H4F-DO1-IR(110019)

on 12.0-H4F-DO1-IR

92:01:AD:C3

68.174

Used 5.60 W

SD-504

B6:01:7B:62

68.172

D62-040-30

D62-040-30

68:8D:B6:00:00:00

192.168.1.1

PoE Supply 0 W

DC Power Supply 0 W

D62-084-30-DC

D62-084-30-DC

68:8D:B6:07:18:D8

192.168.1.41

Port from F[2] to F[10]

PoE Supply 5.60 W

DC Power Supply 0 W

D60-044-90

D60-044-90

68:8D:B6:04:68:D7

192.168.1.15

Port from F[5] to F[4]

PoE Supply 7.80 W

60-AIW

M6000-AIW

68:8D:B6:35:63:38

192.168.1.73

Port 3

PoE Used 3.20 W

ATK General

00:E0:192:1F:92:01

Port 1

Device Type
IP Cameras
✕

Device Name

Model Name

MAC Address

IP Address

Http Port

PoE Used

WAN Address

WAN Port

12.0-H4F-DO1-IR(110019)

12.0-H4F-DO1-IR

00:1F:92:01:AD:C3

192.168.1.74

80

5.5 W

✕ Close
✓ Apply

Login
 Diagnostics
 PoE Reboot

Dashboard
 Notification
 Monitor

H4F-DO1-IR(110019)

on 12.0-H4F-DO1-IR

92:01:AD:C3

68.174

Used 5.60 W

SD-504

B6:01:7B:62

68.172

D62-040-30

D62-040-30

68:8D:B6:00:00:00

192.168.1.1

PoE Supply 0 W

DC Power Supply 0 W

D62-084-30-DC

D62-084-30-DC

68:8D:B6:07:18:D8

192.168.1.41

Port from F[2] to F[10]

PoE Supply 5.60 W

DC Power Supply 0 W

D60-044-90

D60-044-90

68:8D:B6:04:68:D7

192.168.1.15

Port from F[5] to F[4]

PoE Supply 7.80 W

60-AIW

M6000-AIW

68:8D:B6:35:63:38

192.168.1.73

Port 3

PoE Used 3.20 W

ATK General

00:E0:192:1F:92:01

Port 1

Device Type
IP Cameras
✕

Device Name

Model Name

MAC Address

IP Address

Http Port

PoE Used

WAN Address

WAN Port

12.0-H4F-DO1-IR(110019)

12.0-H4F-DO1-IR

00:1F:92:01:AD:C3

192.168.1.74

80

5.5 W

✕ Close
✓ Apply

Login
 Diagnostics
 PoE Reboot

Dashboard
 Notification
 Monitor

H4F-DO1-IR(110019)

on 12.0-H4F-DO1-IR

92:01:AD:C3

68.174

Used 5.60 W

SD-504

B6:01:7B:62

68.172

D62-040-30

D62-040-30

68:8D:B6:00:00:00

192.168.1.1

PoE Supply 0 W

DC Power Supply 0 W

D62-084-30-DC

D62-084-30-DC

68:8D:B6:07:18:D8

192.168.1.41

Port from F[2] to F[10]

PoE Supply 5.60 W

DC Power Supply 0 W

D60-044-90

D60-044-90

68:8D:B6:04:68:D7

192.168.1.15

Port from F[5] to F[4]

PoE Supply 7.80 W

60-AIW

M6000-AIW

68:8D:B6:35:63:38

192.168.1.73

Port 3

PoE Used 3.20 W

ATK General

00:E0:192:1F:92:01

Port 1

Device Type
IP Cameras
✕

Device Name

Model Name

MAC Address

IP Address

Http Port

PoE Used

WAN Address

WAN Port

12.0-H4F-DO1-IR(110019)

12.0-H4F-DO1-IR

00:1F:92:01:AD:C3

192.168.1.74

80

5.5 W

The screenshot displays the Ubiquiti UniFi Network Controller interface. On the left, a network diagram shows a central switch connected to several devices. The switch is labeled with the following information:

- D62-084-30-DC
- D62-084-30-DC
- 68:8D:B6:07:18:D8
- 192.168.1.41
- PoE Supply 0 W
- DC Power Supply 0 W

Below the switch, a list of connected devices is shown:

- D62-040-30
- D62-040-30
- 68:8D:B6:00:00:00
- 192.168.1.1
- Port from P[10] to P[2]
- PoE Supply 4.70 W
- DC Power Supply 0 W

On the right, the 'Diagnostics' window is open, showing details for the 'IP Cameras' device type. The device name is '12.0-H4F-DO1-IR(110019)'. The model name is '12.0-H4F-DO1-IR'. The MAC address is '00:1F:92:01:AD:C3'. The IP address is '192.168.1.74'.

The diagnostics table lists the following devices:

Icon	Diagnostic
1	AETEK D62-084-30-DC D62-084-30-DC 192.168.1.41 68:8D:B6:07:18:D8 Port 10 Speed: 1G 0.00(m)
4	AETEK D62-040-30 D62-040-30 192.168.1.1 68:8D:B6:00:00:00 Port 1 Speed: 100M 6.00(m)
5	Avigilon 12.0-H4F-DO1-IR 12.0-H4F-DO1-IR(110019) 192.168.1.74 00:1F:92:01:AD:C3

On the far right, the 'Device type filter > Show All' dropdown is visible, showing a search bar and a 'PNG' button. Below it, a list of devices is shown, including:

- 1 AETEK D62-084-30-DC
- 2 AETEK D62-084-30-DC
- 3 AETEK SD-504
- 4 AETEK D62-040-30
- 5 Avigilon 12.0-H4F-DO1-IR
- 6 AETEK D60-044-90
- 7 AETEK M6000-ATW

PoE Features

- IEEE802.3at (PoE+ 30W)
- Max. allowed 30W
- Port status table

PoE Port Configuration					
Local Port	PD Class	Power Used	Current Used	Priority	Port Status
1	-	0.00 [W]	0 [mA]	high	No PD detected
2	-	0.00 [W]	0 [mA]	high	No PD detected
3	-	0.00 [W]	0 [mA]	high	No PD detected
4	class0	2.65 [W]	50 [mA]	high	on
5	-	0.00 [W]	0 [mA]	high	No PD detected
6	-	0.00 [W]	0 [mA]	high	No PD detected
7	-	0.00 [W]	0 [mA]	high	No PD detected
8	-	0.00 [W]	0 [mA]	high	No PD detected
Total		2.00 [W]			
Apply Refresh					

Specifications - Software

PoE Management	
Port Configuration	Supports per port PoE configuration function
PoE Scheduling	Supports per port PoE scheduling to turn on/off the PoE devices (PDs).
Auto-checking	Check the link status of PDs. Reboot PDs if there is no responses
Power Delay	The switch provides power to the PDs based on delay time when PoE switch boots up, in order to protect switch from misuse of the PDs.
IP Surveillance Graphical User Interface Specifications	
Automatic Discovery	Discover IP cameras complying ONVIF automatically
Topology View	Generate Topology maps to manage IP cameras
Floor view	It's easy to drag and drop PoE devices and help you to build smart workforces
Map view	Enhance efficiency to drag and drop devices and monitor surroundings on google map
Traffic Monitoring	Comprehensive chart to show traffic status
PoE Management	Reboot IP camera, Scheduling PoE on/off, alive checking, Power delay as PoE switch boots up, PoE configuration
Layer 2 Switching Specifications	
Spanning Tree Protocol	MAC Bridges Standard Spanning Tree (STP) 802.1d, Rapid Spanning Tree (RSTP) 802.1w, Multiple Spanning Tree (MSTP) 802.1s
IP/Mac Port Trunking	Link Aggregation Control Protocol (LACP) IEEE 802.3ad , Static aggregation.
VLAN	Supports up to 4K VLANs simultaneously (out of 4096 VLAN IDs), Port-based VLAN, 802.1Q tag-based VLAN
IGMP v1/v2 Snooping	IGMP limits bandwidth-intensive multicast traffic to only the requesters.
Layer 3 Switching Specifications	
DHCP Server	Assign IP to DHCP clients
Security	
IEEE 802.1X	IEEE802.1X: RADIUS authentication, authorization, MD5 hash, guest VLAN, single/multiple host mode and single/multiple sessions, Dynamic VLAN assignment
Port Security	Locks MAC addresses to ports, and limits the number of learned MAC address
Storm Control	Prevents traffic on a LAN from being disrupted by a broadcast, multicast, or unicast storm on a port
Loop Protection	To prevent unknown unicast, broadcast and multicast loops in Layer 2 switching configurations.
RADIUS/ TACACS+	Supports RADIUS and TACACS+ authentication. Switch as a client
QoS	
Classification	Port based, 802.1p VLAN priority based
Bandwidth Control	Ingress policer, Egress shaping and rate control, Per port
Management software	
Port Mirroring	Traffic on a port can be mirrored to another port for analysis with a network analyzer or RMON probe. Up to N-1 (N is Switch's Ports) ports can be mirrored to single destination port. A single session is supported.
IEEE 802.1ab (LLDP)	Used by network devices for advertising their identities, capabilities, and neighbors on an IEEE 802ab local area network, Support LLDP-MED extensions
Web GUI Interface	Built-in switch configuration utility for browser-based device configuration
SNMP	SNMP version1, 2c, 3
Flow Control	The IEEE 802.3x standard for monitoring high speed switched networks. It gives complete visibility into the use of networks enabling performance optimization, accounting/billing for usage, and defense against security threats
Firmware Upgrade	Web browser upgrade HTTP and TFTP
NTP	Network Time Protocol (NTP) is a networking protocol for clock synchronization between computer systems over packet-switched
Other Management	System, HTTP, DHCP Client, Cable Diagnostics, Syslog, IPV4/IPV6 Management, SSH, Telnet

Specifications

	D62-040-30
Networking	
Total Gigabit Ethernet Ports	5
Gigabit Ethernet 802.3af/at/bt PoE Ports	4 x 30W at PoE
Gigabit Ethernet PoE PD Ports (RJ45)	1
Forwarding Capacity	7.4Mpps
Mac Table	8K
Jumbo Frames	9,216 Bytes
Switching Capacity	10 Gbps
Power	
Input Power	90W bt PoE
Input PoE PD Power Pin Assignment	12(-), 36(+), 45(+), 78(-) or 12(+), 36(-), 45(+), 78(-)
Output Power per PoE Port	PoE IEEE 802.3af (Max. 15.4W) PoE+ IEEE 802.3at (Max. 30W)
Output PoE Power Pin Assignment	12(+), 36(-)
Output Power per DC Port	2 x 12VDC@2.5A 2 x 24VDC@1.25A
System Power Consumption (without PoE)	10W
PoE Output Power Budget	72W
Surge Protection per PoE Port	6KV
Mechanical	
Dimensions (W x D x H)	45.2 x 99.9 x 130 mm
Weight	1 kg (2.2 lb)
DI/DO	1/1
Console	RJ45
Reset Button	2~7 sec.: Reset 7~12 sec.: Restore default
Environmental	
Operating Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Operating Humidity	5% ~ 95% non-condensing
Certifications	
EMC	CE, FCC, VCCI, C-Tick
Surge	EN61000-4-5

Optional Accessories

L2 PRO 90W bt PoE Switch	
	C62-044-91-380 • 4xGbE 90W bt PoE + 2xGbE RJ45 + 2xGbE SFP • 100~240VAC Input
L2 PRO 90W bt PoE Switch	
	C62-084-91-770 • 8xGbE 90W bt PoE + 2xGbE RJ45 + 2xGbE SFP • 100~240VAC Input
Outdoor IP67/IK10 L2 PRO Gigabit Ethernet PoE Switch	
	H60-044-91-250 • 4xGbE 90W bt PoE + 2xGbE RJ45 + 2x GbE SFP • 100~240VAC Input
Outdoor IP67/IK10 Gigabit Ethernet PoE Switch	
	H40-044-91-250-V3 • 4x 90W bt PoE + 2xGbE SFP + 2xGbE RJ45 • 100~240VAC Input
Outdoor IP67/IK10 L2 PRO Gigabit Ethernet PoE Switch by 12~56VDC	
	H60-044-91-DC • 4xGbE 90W bt PoE + 2xGbE RJ45 + 2x GbE SFP • 12~56VDC Input

Optional Accessories

Outdoor IP67/IK10 Gigabit Ethernet PoE Switch by 12~56VDC  H40-044-91-DC • 4x 90W bt PoE + 2xGbE SFP + 2xGbE RJ45 • 12~56VDC Input	Outdoor IP67/IK10 Gigabit Ethernet PoE Switch by 12~56VDC  H40-022-91-120-V2 • 2xGbE 90W bt PoE + 2x GbE SFP • 12~56VDC Input	Outdoor IP67/IK10 Gigabit Ethernet PoE Switch by 12~56VDC  H40-022-91-DC-A • 2xGbE 90W bt PoE + 2x GbE SFP • 12~56VDC Input • For Avigilon PTZ/IR PTZ
Outdoor IP67/IK10 Gigabit Ethernet PoE Switch  H40-022-91-120-V2 • 2xGbE 90W bt PoE + 2x GbE SFP • 100~240VAC Input	Outdoor IP67/IK10 Gigabit Ethernet PoE Switch  H40-022-91-120-A-V2 • 2xGbE 90W bt PoE + 2x GbE SFP • 100~240VAC Input • For Avigilon PTZ/IR PTZ	
Din-Rail Industrial L2 PRO Gigabit Ethernet PoE Switch  D60-044-91 • 4xGbE 90W bt PoE + 2xGbE RJ45 + 2x GbE SFP • 48~56VDC Input	Din-Rail Industrial Gigabit PoE Switch  D40-044-91 • 4x 90W bt PoE + 2xGbE SFP + 2xGbE RJ45 • 48~56VDC Input	Din-Rail Industrial Gigabit PoE Media Converter  M30-022-91-V2 • 2-port Gigabit 90W bt PoE + 2-port Gigabit SFP
Din-Rail Industrial L2 PRO Gigabit Ethernet PoE Switch by 12~56VDC  D60-044-91-DC • 4xGbE 90W bt PoE + 2xGbE RJ45 + 2x GbE SFP • 12~56VDC Input	Din-Rail Industrial Gigabit PoE Switch by 12~56VDC  D40-044-91-DC • 4x 90W bt PoE + 2xGbE SFP + 2xGbE RJ45 • 12~56VDC Input	
Indoor Gigabit PoE Injector  I39-210-V2 • Indoor GbE 90W bt PoE Injector • 100~240VAC Input	IP67/IK10 Gigabit PoE Injector  I49-211-A • IP67/IK10 GbE 90W bt PoE Injector • 12~56VDC Input	IP67/IK10 Gigabit PoE Injector  I49-210-V2 • IP67/IK10 GbE 90W bt PoE Injector • 48~56VDC Input
Din-Rail Industrial PoE Injectors  I69-210-V2 • Industrial GbE 90W bt PoE Injector • 48~56VDC Input	Din-Rail Industrial PoE Injectors  I69-216-V2 • Industrial GbE 90W bt PoE Injector • 12~56VDC Input	Din-Rail Industrial PoE Splitter  S69-220 • Industrial GbE 90W bt PoE Splitter • 48~56VDC Input
Pole Mount  AT-100 • Pole Mount Adapter	Pole Mount  AT-101 • Pole Mount Adapter	Corner Mount  AT-200 • Corner Mount Adapter
Junction Box  JB-200 • Junction Box		